

Enable Scan-to-USB	1
How to Enable Scan-to-USB “External Memory Function Settings”	2
Scan-to-USB Procedure	3
How to Sell Feedback — Scan-To-USB	4
Set-Up Scan Program	5
Customizing Scan Screen Function Keys	9
Scan-to-PDF/A	11
Scan-to-Linearized PDF	13
Scanning to Powerpoint	14
Sort Scan Addresses by Category Name	15
Display Addresses by List or Button Images	16
Searching for Destinations — Address Search or Name Search	17
Name Search	17
Address Search	18
Setting Up LDAP Server for LDAP Search from the MFP	19
Performing an LDAP Search — LDAP Search & Advanced LDAP Search	22
LDAP Search	22
Advanced LDAP Search	23
Change Default Scanner Settings	25
Real Time Preview and Editing of Scan Job	28
Create a Password Encrypted PDF File Type/Send via Email	31
Create a Password Encrypted PDF File Type	31
Send File via Email	34
Registering an Email One Touch Button through PageScope Web Connection	35
Registering Scan Subject Lines	38
Selecting a Pre-registered Subject Line when sending an Email	41
Adding Menu Keys to the Home  Screen	43
Blank Page Removal — Scan	46
Save and Print	49
Multiple File Attachment to Email using the Attachment Method Function	51
Programming Register Keys	53
Adding User Box Shortcut Keys	54

Enable Scan-to-USB

WHAT & WHY

“Scan-to-USB” feature allows you to scan your originals to your USB device through the MFP.

It is a fast and easy way of converting your hard copies to electronic format and store them.

PRECAUTIONS

Scanned data is stored directly to external memory.

System setting changes required to support this function.

Compatible External Memory

- USB Memory formatted as FAT32 required.
- Use devices that draw up to the rated power consumption (0.5A) in the USB Port.

USB Hard Disks are NOT supported

- Cannot use devices that draw more than the rated power consumption.

Protective Function

- If USB device draws more power than the USB port, system protective function will disable USB functions.

Prohibited actions

- Do not remove external memory while data is being saved (or printed).
- Do not use 2 USB memory devices at the same time.
- Do not use a USB hub.

APPLICATION

Your customer collected a good amount of paper during a series of meetings. He was complaining about what he is going to do with all that paper and mentioned that it would be great if he could keep them in digital format rather than as hard copies.

bizhub C754/C654 scan job shops

HOW TO ENABLE SCAN-TO-USB “EXTERNAL MEMORY FUNCTION SETTINGS”

Pre-requisites

You will need a USB Thumb Drive and a hard copy original.

1. Press the **Utility** icon on the **LCD Home Screen** (Press the **Menu** key to set the Home Screen if necessary).
2. Touch **#3 Administrator Setting**.
3. Enter the administrator password: **1234567812345678**.
4. Press **OK**.
5. Touch **#1 System Settings** tab.
6. Touch **#0 User Box Settings** tab.
7. Touch **#7 External Memory Function Settings**.
8. Touch **Save Document** tab. (This will allow you to Scan-to-USB).

Other Options here are:

Print Document (this will allow you to print from the USB thumb drive)

External Memory Document Scan (this will allow you to take a document from a USB thumb drive and save it in a User Box on the MFP).

9. Touch **ON**.
10. Touch **OK**.
11. **Close** until you return to the **Home** screen.

LEGAL VERTICAL MARKETS



Useful Tips:

- For the legal professional who obtain hard copies on a daily basis, and often need to carry these documents home, to other offices, etc. and being able to scan documents on the go and onto their USB drive is a good feature.


Scan-to-USB Procedure

HOW

Pre-requisites

You will need a USB Thumb Drive and a hard copy original.


1. Plug in your **USB Thumb Drive** into the USB port on the front right corner of the MFP.
2. An icon comes up on the MFP that tells you an external memory is connected.
3. Place your original on the **Dual Scanner** or **RADF**.
4. Touch **Save a Document to External Memory** icon.

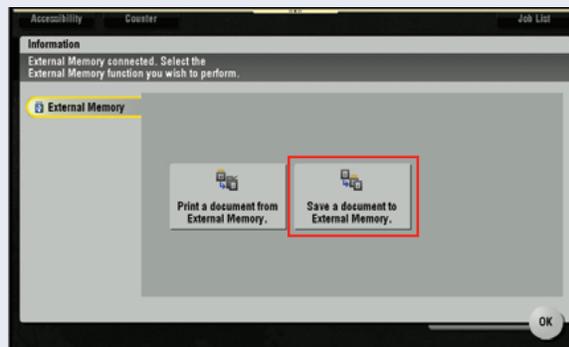

5. Touch **File Name Keyboard** icon.



6. Press **C** to clear the name assigned by the machine.
7. Type **"test."**
8. Touch **OK**.

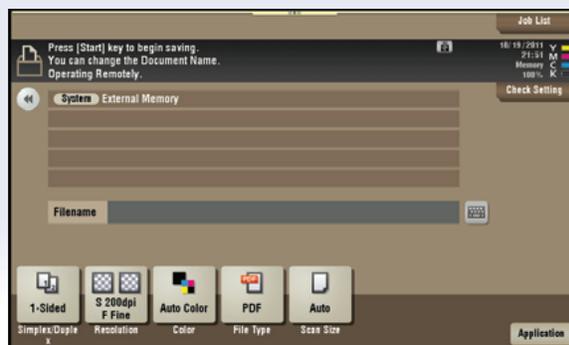

bizhub C754/C654 scan job shops

9. Touch **File Type** tab.
10. Select **JPEG** as file type.
11. Touch **OK**.
12. Press **Start** button to scan your document to the USB Thumb drive.



HOW TO SELL FEEDBACK — SCAN-TO-USB

- No laptop boot up required.
- Can I have that file? — quick print.
- Load files on thumb drive – go to meeting – download at device – no PC required.
- Real Estate – upload house design to prospect.
- Financial/Mortgage – Loan Documents, supporting documentation, capture info, electronic file.
- Legal – in the courtroom – print necessary documents on the spot from files on USB, no need to recess and reconvene just for documentation – reduces court costs.
- From USB, Microsoft Briefcase to synch files on thumb drive.
- Medical vertical – Multiple MFPs not networked, different domains, Scan-Print.
- Local Mom/Pop Stores, UPS stores, PFP applications.
- Me Too!! Toshiba, Sharp etc. already have it.
- Hardcopy to USB for file distribution.
- Tested – Device will overwrite the USB document with the scanned document if they have the same name.
- No Scan-to-USB in high security area.
- Carry large print files from office to office.
- Portable backup of important job.
- To make it difficult for thieves, when public user is ON – external memory must be OFF.

Set-Up Scan Program

Pre-requisites

This job shop instructs you how to set up commonly used scan settings as a program button that can be recalled and used without any additional set-up.

APPLICATIONS

The PROGRAM functionality allows a “one touch” key to be programmed for frequently used job parameters. These “one touch” keys can then be given “job names” for easy future access. This feature promotes a “user friendly office environment” for the end-users. Up to 30 job programs can be stored.

Sales people often refer to this feature as “A demo in a box” because it increases the ease of operation during a selling demonstration. Rather than taking a potential client through the multiple steps required to complete a job, saving these steps into a PROGRAM and naming the job “Mortgage Application”, “Student Records” etc, demonstrates “ease of use” for the client.

Steps/Keystrokes:

Setting up the Scan job parameters

If not on the **Home** screen touch the **Menu** key on the **Control Panel** .

1. Touch the **Scan/Fax** icon.

If already on the Scan/Fax screen press the “Reset” Key before beginning this job shop.



2. Touch **Simplex/Duplex** tab.
3. Select **2-Sided**.



bizhub C754/C654 scan job shops

4. Touch **Resolution** tab.

5. Select **300 x 300**.

6. Touch **OK**.



7. Touch **Colour** tab.

8. Select **Black**.



9. Touch **Program**.



10. Touch any key labeled **Not Registered**.

11. Touch **New**.



bizhub C754/C654 scan job shops

12. Touch **Name keyboard** icon and input **Job Name Mortgage Application**.

13. Touch **OK** 2 times.

*From the Scan/Fax screen
Press the "Reset" Key
before beginning the
following exercise.*



To Retrieve Job

14. Insert multi-page document on the **Dual Scanner** or **RADF**.

15. Touch **Program**.

16. Touch **Mortgage Application** (Pre-Programmed Job).

17. Touch **Recall**.



bizhub C754/C654 scan job shops

18. Select a desired scan location **example:**
Email address or
Scan-to-SMB location.

19. Touch **Start**.

*Press the “Reset” Key
before beginning the
following exercise.*



Deleting a Pre-Programmed Job

20. Touch **Program**.


21. Touch the **Pre-Registered Copy Program** (in this case **Mortgage Application**).

22. Touch **Delete**.



23. Touch **Yes** when prompted “Are you sure you want to delete this copy program?”

24. Touch **Close**.

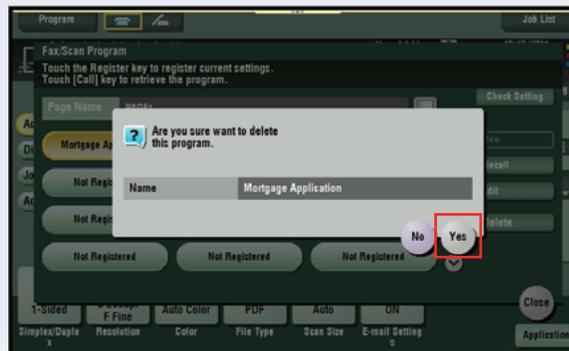

SELLING POINTS


- Frequently used job parameters can be retrieved quickly and easily.
- Easy access to specific job parameters increases productivity.
- User Friendly.

Customizing Scan Screen Function Keys

All of the function keys that appear along the bottom of the Copy and Scan screens can be arranged to the user's preferences. The ability to do this is disabled when the MFP is shipped and has to be turned on. To determine if this function is enabled, touch the **Utility** key and then the **Custom Display** key. If options #4 and #5 are not present, then start at step 1. If those keys are present, then start at step 10.

If not on the **Home** screen
Touch the **Menu** hard key
on the **Control Panel** .

1. Touch the **Utility** icon.
2. Touch the **#3 Administrator Settings** key, enter **1234567812345678** and touch **OK**.

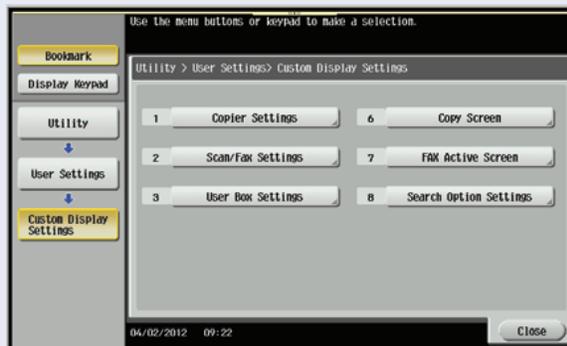

3. Touch the **#1 System Settings** key and press the **Forward** arrow twice to get to the 3/3 screen.
4. Select **#4 Custom Display Settings**.



5. Select **#5 Function Display Key Permission Settings**.
6. Touch the **Copy/Print** key and select **Allow**.
7. Touch the **Send/Save** key and select **Allow**.



bizhub C754/C654 scan job shops

8. Touch **OK** twice and **Close 4 times** to return to Main Screen.


NOTE: This only gives permission to make changes to the Copy and Scan function keys. The actual customization is done from another screen.

9. If not on the **Home** screen Touch the **Menu** hard key on the **Control Panel** .
10. Touch the **Utility** icon.
11. Select **#2 User Settings**.
12. Touch **#2 Custom Display Settings**.
13. Touch **#5 Function Display Key** (Send/Save).

14. Scroll to screen 2/2 and select **Function Key 7** and touch **ON**, then touch **OK**. If the Key is already turned on, then proceed to the next step.



15. Select **Separate Scan**, then touch **OK**. If that selection is already chosen, then select another function and touch **OK**.

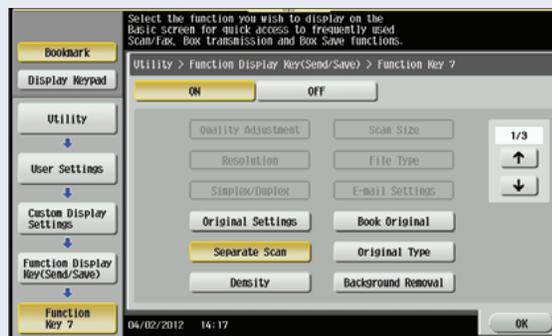

16. Touch **Close 4 times** to return to the main screen.
17. If not on the **Scan** screen, touch **Scan** on the home screen. Observe that the #7 function key is now changed to your selection.

To restore the device to its original settings, repeat steps 10–18. Turn **Function Key 7** off or return it to the same setting it was at the beginning of this exercise.



Scan-to-PDF/A

Pre-requisites:


Requires LK-102v3 i-Option License Kit and UK-204 i-Option Memory Upgrade.

APPLICATION

Creating PDF/A files is critical to those customers that need to maintain the integrity of the PDF/A file. PDF/A is a popular PDF format file type that is desired for long-term digital archiving. This file format is a document management standard ISO19005 established by the ISO (International Organization for Standardization) in an effort to address the increasing need to maintain the integrity of electronic documents over long periods of time.

If not on the **Home** screen touch the **Menu** key on the **Control Panel** .

1. Touch the **Scan/Fax** icon.
2. Touch **File Type**.
3. Touch **PDF or Compact PDF**.
4. Touch **PDF Detail Setting**.
5. Touch **PDF/A**.
6. Touch **ON**.
7. Touch **PDF/A-1a**
(or **PDF/A-1b**).
8. Touch **OK** 3x.
9. Select destination.
10. Press **START**.

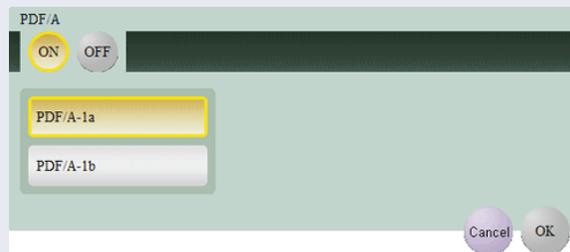

LEGAL VERTICAL MARKETS



Useful Tips:

- Lawyers, paralegals, court officers, judges and other legal representatives can rest assured that any law documents, evidence or files that exist in a PDF format have preserved all information associated with the file even over extended periods of time.

continued

**LEGAL
VERTICAL
MARKETS**
continued



- The PDF/A file format standard was established to preserve the visual appearance of the electronic document over the course of time and to enable future access to these files regardless of the technology to come. The information that needs to be accessible includes content (text, raster images vector graphics), fonts and colour.
- To ensure compatibility in the future and the “self-containment” of the file, the ISO 19005 standard stipulates that 1) Metadata must be embedded about the electronic document and 2) The logical structure and semantic properties of the electronic document must be defined.

Scan-to-Linearized PDF

Pre-requisites:


Requires LK-102 v3 i-Option License Kit and UK-204 i-Option Memory Upgrade.

BUSINESS APPLICATION

In today's world, almost every work environment, business, organization, etc. has a web site and in many instances, customers have to post files that only exist in hard copy format. This means they have to scan the file to create an electronic version to post. When a Linearized PDF file is posted on a web site, the first page is loaded so the viewer can begin to read and review the file while the subsequent pages are loaded. If a non-Linearized PDF file is posted, the viewer has to wait until all pages are loaded before they can begin reading the first page.

If not on the HOME screen touch the MENU key on the Control Panel .

1. Touch the **Scan/Fax** icon.
2. Touch **File Type**.
3. Touch **PDF** or **Compact PDF**.
4. Touch **PDF Detail Setting**.
5. Touch **PDF Web Optimization**.
6. Touch **OK 2x**.
7. Select **Destination**.
8. Press **Start**.

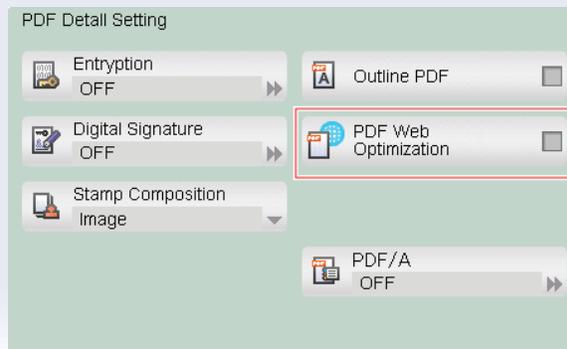

EDUCATIONAL VERTICAL MARKETS



Useful Tips:

- Teachers have older text books and other resource materials that only exist in hard copy format. They are able to scan these documents and post them on their web site for student or parent access.

bizhub C754/C654 scan job shops

Scanning to Powerpoint

Business Application: The Scan to Powerpoint function makes it possible to scan hard copy documents and convert them to Powerpoint slides than can be easily inserted into a presentation.

If not on the **Home** screen touch the **Menu** key on the **Control Panel** .

1. Touch the **Scan/Fax** icon.
2. Touch **File Type**.
3. Select **PPTX**.
4. Touch **OK**.
5. Select **Destination**.
6. Press **Start**.



EDUCATIONAL Useful Tips:

VERTICAL MARKETS



- Teachers and professors can quickly scan hard copy documents and convert them to Powerpoint slides and then send them to a USB attached to the MFP for last-minute use in a presentation.

Sort Scan Addresses by Category Name

Pre-requisites:

Scan (Email, FTP, SMB, etc.) and Fax Addresses must be pre-registered.

APPLICATION


MFP is located in a large workgroup or a visitor to the department has to perform a scan or fax operation. There are hundreds of scan and fax destinations registered on the device. Though the destinations are logically organized, the end user wants a simple way to find the destination they need.

If not on the **Home** screen touch the **Menu** key on the Control Panel .

1. Touch the **Scan/Fax** icon.
2. Touch **Add Type** (Address Type).



3. From the menu that appears, touch the **Address Type** desired.

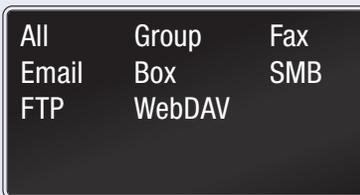

4. Touch **Email** to display all Email addresses stored on the MFP (or touch Fax, Box, SMB, FTP, etc.).

Only the addresses that match the Address Type selected will be displayed. If you select **ALL**, then all the destinations that have been registered on the MFP, regardless of type, will be displayed.

Display Addresses by List or Button Images

Pre-requisites:

Scan (Email, FTP, SMB, etc.) and Fax Addresses must be pre-registered.

APPLICATION

MFP is located in a large workgroup or a visitor to the department has to perform a scan or fax operation. There are hundreds of scan and fax destinations registered on the device. Though the destinations are logically organized, the end user wants a simple way to find the destination they need. Some users prefer to view the registered destinations in list form and others in button or one-touch key form.

If not on the **Home** screen touch the **Menu** key on the Control Panel .


1. Touch the **Scan/Fax** icon.
2. Touch the  icon to view the addresses in list form.



3. Touch the  icon to view the button images (one-touch key layout).

You can select the desired destination from either display.

4. Press **Start**.

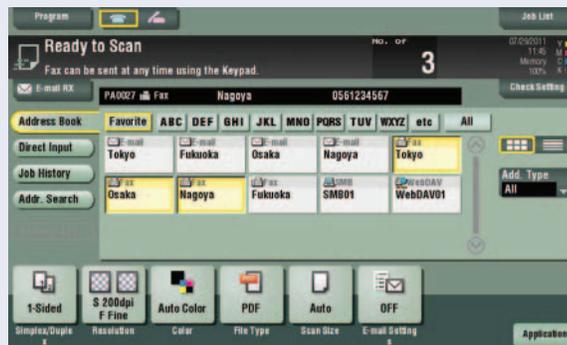

Searching for Destinations — Address Search or Name Search

Pre-requisites:

Scan and fax destinations must be pre-registered.


APPLICATION

Users want a quick and easy way to find scan (Email, FTP, SMB, etc.) and fax destinations programmed in one-touch keys. The bizhub MFP offers two ways to quickly search for destinations that have been programmed. Users can search by address or by name.

NAME SEARCH

If not on the **Home** screen touch the **Menu** key on the Control Panel .

1. Touch the **Scan/Fax** icon.
2. Touch **Addr. Search**.
3. Touch **Search**.

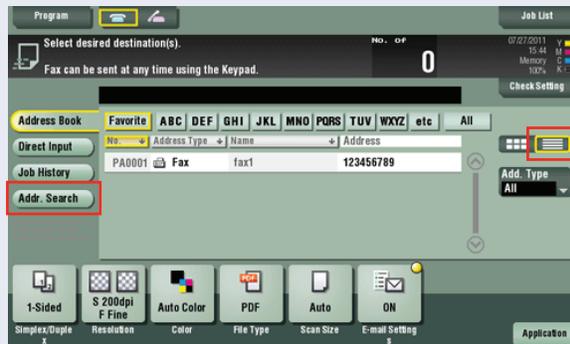

4. Press **Name Search** to search by Name.
5. Enter first few letters of the Email address (or first few digits of a fax number).
6. Press **Search**.
7. Touch the **Desired Destination**.
8. Press **Start** to send.



bizhub C754/C654 scan job shops

ADDRESS SEARCH

If not on the **Home** screen touch the **Menu** key on the Control Panel .

1. Touch the **Scan/Fax** icon.
2. Touch **Addr. Search**.
3. Press **Address Search** to search by Address.
4. Touch **Search**.
5. Enter first few letters of the Email address (or first few digits of fax number).
6. Press **Search**.
7. Touch the **Desired Destination**.
8. Press **Start** to send.



Setting Up LDAP Server for LDAP Search from the MFP

Pre-requisites:

LDAP Administrator or IT Representative knowledgeable about the LDAP Server must set up the Konica Minolta MFP to integrate with the LDAP Server(s).

To use the LDAP function of an Active Directory server, you must register the DNS server that synchronizes the Active Directory on the MFP before starting the procedure.

To use the LDAP function of the Active Directory server, you must match the date and time of the MFP and Active Directory.

APPLICATION

Users want to access Email Addresses or Fax Numbers via the LDAP Server so that they don't need to manually input (direct input) or access one-touch (requires registration/programming address) keys to distribute information as an Email or a Fax. By accessing the LDAP Server for destination information, users don't have to worry about updating one-touch address information or looking up email addresses or fax numbers for direct input operations. As people come and go, IT is responsible keeping the LDAP Server up to date.

When a directory server such as an LDAP Server or Active Directory is used to manage users, you can search for a destination (E-mail address or fax number) from the server.

LDAP Settings will vary depending on customer requirements and network environment.

When you use SSL to encrypt a communication with the server; you can make communications more secure. The use of the SSL Protocol is up to each customer.

If not on the **Home** screen touch the **Menu** key on the Control Panel .

1. Touch the **Utility** icon.
2. Touch **Administrator Settings**.
3. Enter **Password** (Default is **1234567812345678**).
4. Touch **Network Settings**.
5. Touch **LDAP Settings**.
6. Touch **Enable LDAP**.
7. Touch **ON**.

bizhub C754/C654 scan job shops

8. Touch **OK**.
9. Touch **Setting Up LDAP**.
10. Touch a **Non-Registered Key**.
11. Touch **Server Name and** input **Server Name**.
12. Enter **LDAP Settings**.
 - a. Max. Search Results (5-1000).
 - b. Timeout (5-300 Seconds).
 - c. Initial Search Settings.
 - i. Touch **Name** and select **OR, AND, STARTS WITH** or **ENDS WITH**.
 - ii. Touch **Email** and select **OR, AND, STARTS WITH** or **ENDS WITH**.
 - iii. Touch **Fax Number** and select **OR, AND, STARTS WITH** or **ENDS WITH**.
 - iv. Touch **Last Name** and select **OR, AND, STARTS WITH** or **ENDS WITH**.
 - v. Touch **First Name** and select **OR, AND, STARTS WITH** or **ENDS WITH**.
 - d. Press **Forward (▶▶) Arrow** to access screen 2/2.
 - i. Touch **Copy** and select **OR, AND, STARTS WITH** or **ENDS WITH**.
 - ii. Touch **Company Name** and select **OR, AND, STARTS WITH** or **ENDS WITH**.
 - iii. Touch **Department** and select **OR, AND, STARTS WITH** or **ENDS WITH**.
 - e. Press **OK**.
 - f. Touch **Change Search Name Attribute** and select **Name** or **Nickname**.
 - g. Touch **OK**.
 - h. Touch **Search** and touch **ON** or **OFF**.
 - i. Touch **Forward (▶▶) Arrow** to advance to screen 2/8.
 - i. Touch **Server Address** and input **LDAP Server IP Address** (you can enter an **IPv4** or **IPv6 Address** or **Host Name**).
 - ii. Touch **OK**.
 - iii. Touch **Search Base** and enter **Search Base**.
 - iv. Touch **OK**.

- j. Touch **Forward (▶▶) Arrow** to advance to screen 3/8.
 - i. Select **SSL Setting** (default is **OFF**; press is **ON** if required).
OR
 - ii. Press **Input** (Port Number Section) to enter **Port #**.
OR
 - iii. Press **Input** (Port Number SSL Section) to enter **Port #**.
- k. Touch **Forward (▶▶) Arrow** to advance to screen 4/8.
 - i. Select **Certificate Verification Level Settings** and touch desired setting for each item.

Expiration Date	Confirm	Do Not Confirm
Key Usage	Confirm	Do Not Confirm
Chain	Confirm	Do Not Confirm
Expiration Date Confirmation	Confirm	Do Not Confirm
CN	Confirm	Do Not Confirm

- l. Touch **Forward (▶▶) Arrow** to advance to screen 5/8.
 - i. Select **Authentication Type** (Anonymous, Digest-MD5, NTLM v1, Simple, GSS-SPNEGO, NTLMv2).
 - m. Touch **Forward (▶▶) Arrow** to advance screen 6/8.
 - i. From **Server Authentication Method Menu** select **Use Settings, Use User Authentication** or **Dynamic Authentication**.
 - ii. From the **Select Referral Setting Menu** select **ON** or **OFF**.
 - n. Touch **Forward (▶▶) Arrow** to advance screen 7/8.
 - i. Touch **Login** and enter **Login Name**.
 - ii. Touch **Password** and enter **Password**.
 - iii. Touch **Domain Name** and enter **Domain Name**.
 - o. Touch **Forward (▶▶) Arrow** to advance screen 8/8 (proceed to this step if Search Attributes and Authentication have been set).
13. Touch **OK**.
14. Touch **Close 5x**.

NOTE: LDAP Service can also be set up using PageScope Web Connection.

Performing an LDAP Search — LDAP Search & Advanced LDAP Search

Pre-requisites:

LDAP Server Settings must be set on MFP and LDAP Server must be configured to recognize MFP. This requires LDAP Administrator and/or IT intervention.

APPLICATION

When using the LDAP server or Active Directory of Windows Server, the LDAP search function allows users to search for an E-mail address through the server. Users want to access Email Addresses or Fax Numbers via the LDAP Server so that they don't need to manually input (direct input) or access one-touch (requires registration/programming address) keys to distribute information as an Email or a Fax. By accessing the LDAP Server for destination information, users don't have to worry about updating one-touch address information or looking up email addresses or fax numbers for direct input operations. As people come and go, IT is responsible for keeping the LDAP Server up to date, not the end user, key operator or system administrator.

There are two ways to perform an LDAP Search. First, you can use **Address Search** whereby an Email address or a fax number is searched by a single keyword. Second you can use the **Advanced LDAP Search** in which an Email Address or fax number is searched by a combination of keywords from different categories.

LDAP SEARCH

If not on the **Home** screen touch the **Menu** key on the Control Panel .

1. Touch the **Scan/Fax** icon.
2. Touch **Addr. Search**.
3. Touch **Search**.



bizhub C754/C654 scan job shops

4. Touch **LDAP Search**.
5. Enter **Keyword**.
6. Press **Search**.
7. Select **Desired Destination** from the search results.
8. Press **Start** to send.



ADVANCED LDAP SEARCH

If not on the **Home** screen touch the **Menu** key on the Control Panel .

1. Touch the **Scan/Fax** icon.
2. Touch **Addr. Search**.
3. Touch **Search**.



4. Touch **Adv. Search (LDAP)**.
5. Enter **text** in desired **Search Criteria** (you can search by Name, Email, Fax Number, Last Name, First Name, City, Company Name, Department or using a combination of search criteria — Name and City, Name, City and Company Name, etc.).



- Touch **Name** and name field will be checked .
- Touch keyboard symbol (to the right of the field name) and enter **Name**.

bizhub C754/C654 scan job shops


6. Touch **OK**.
7. Press **Search**.
8. Select the **Destination** from the search result.
9. Press **Start** to send.

Change Default Scanner Settings

This exercise demonstrates how users can customize their default scanner settings on the MFP Control Panel. Change the walk-up default scan settings to scan at Resolution 300 x 300 and File Type Compact PDF.

Business Purpose: This law firm scans large color files that need to be compact in size but must also be scanned at 300 x 300 dpi to ensure the courts will accept the quality of these image files. The owner wants her bizhub always set to scan in colour at 300 x 300 dpi and with the File Type Compact PDF.


1. If not on the **Home** screen press the **Menu** key .
2. Select the **Scan/Fax** icon on the **Home** screen.

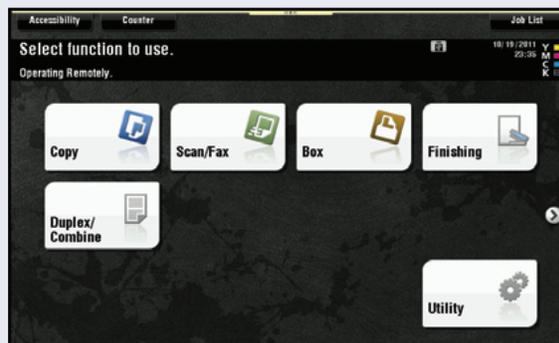

3. Touch **Resolution** tab.
4. Select **300 x 300**.
5. Touch **OK**.




6. Touch **File Type** tab.
7. Select **Compact PDF**.
8. Press the **Menu** key to return to the **Home** screen.

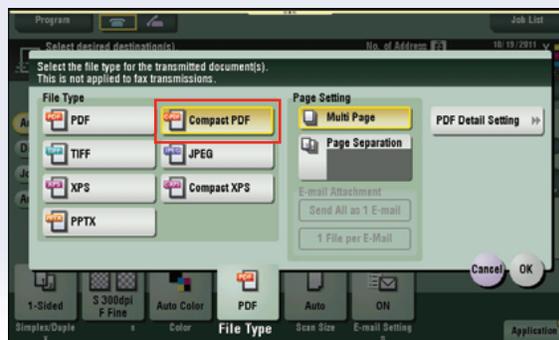


bizhub C754/C654 scan job shops


9. Select the **Utility** icon.

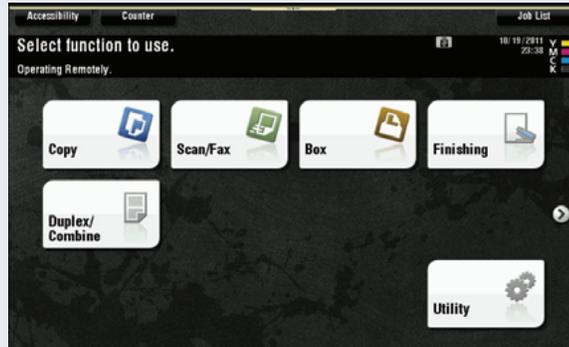


10. Select **#2 User Settings** on the **Control Panel** touch screen.

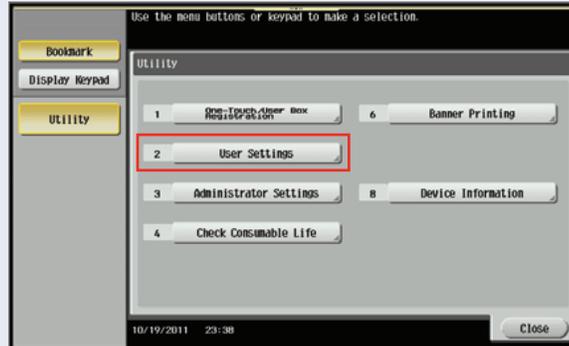

11. Then select **#4 Scan/Fax Settings**.

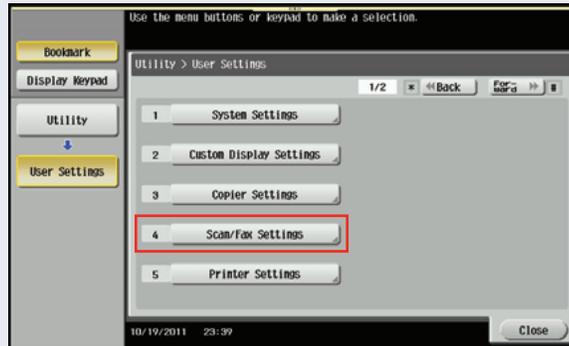

12. Select **Default Scan/Fax Settings**.

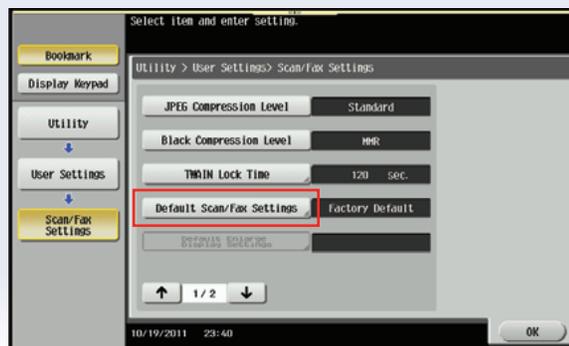


bizhub C754/C654 scan job shops

13. Select **Current Setting**.

14. Select **OK** twice. Then select Close twice.

15. Press **Reset**.

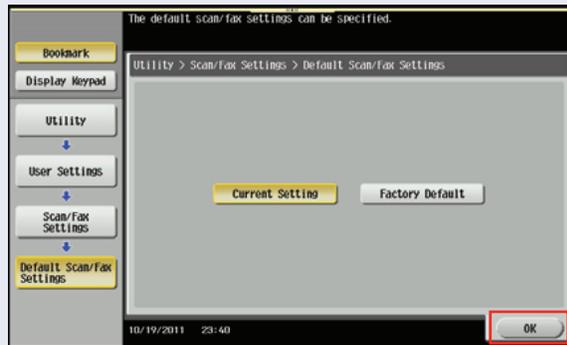

16. Notice that your scanner defaults have changed to **Resolution, 300 x 300** and **File Type, Compact PDF**.



bizhub C754/C654 scan job shops

Real Time Preview and Editing of Scan Job

Business application: Allows the user to preview and edit a scan job before sending and to add more pages if desired.

Pre-requisite

A one touch Email or SMB button should be registered on the device in your office or showroom for demonstration purposes. If none are registered on the device, please refer to the Job shop titled

Registering an Email One Touch Button through Pagescope Web Connection


You will need a 6 page original document size (A4).

If not on the **Home** screen touch the **Menu** key on the **Control Panel** .

Touch the **Scan/Fax** icon.

1. Place **4 Originals** in the **Document Feeder**.
2. Select a **Registered One Touch Destination**.

The file can be sent as an SMB scan, FTP scan or EMAIL attachment.

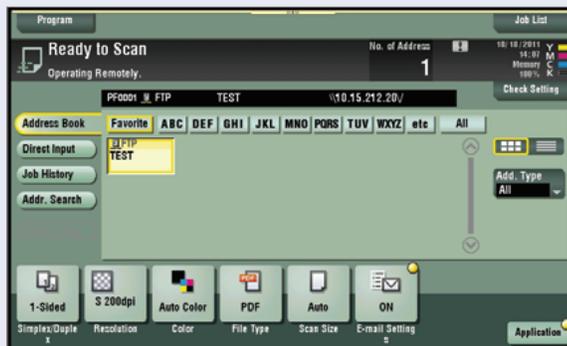


3. Press the **Preview** button on the side of the **Control Panel**.




4. Select the icon that matches the direction of the originals that are in the document feeder.



5. Touch **Start** on the **Touch Panel** or press the **Start** button. Observe that the image on the screen is the 4 originals that were just scanned. Scroll through the pages on the screen.

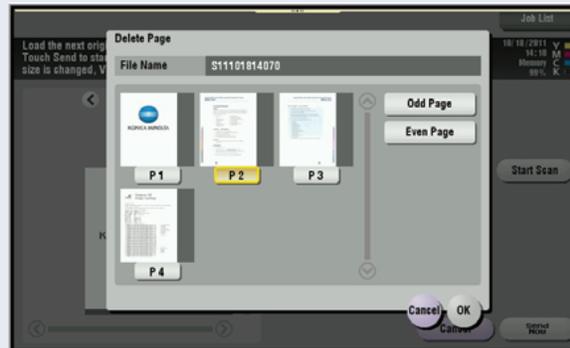

6. Touch the **Zoom** key .
7. Touch **Delete Page**.
8. Select **Page 2** and touch **OK**.
9. Confirm that you want to delete the page by touching **YES** when prompted.

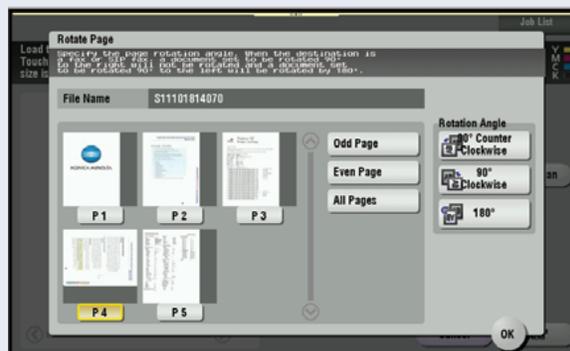

10. Place **2 More Pages** in the **Document Feeder**.
11. Touch **Start Scan** on the **Touch Panel**. Scroll to view the new pages that are now visible on the screen.
12. Touch the **Zoom** key .
13. Touch **Rotate Page**.
14. Select **Page 4**.

bizhub C754/C654 scan job shops

15. Select the **Rotation Angle** as **90° Clockwise**.
16. Touch **OK**.
17. Touch **Send Now** or press the **Start** button to send the document as previewed on the panel.

LEGAL VERTICAL MARKETS



Useful Tips:

- The legal professional spends an abundant amount of time scanning documents at the MFP and being able to preview the important documents before they go to court or to other Solicitor's offices would be a time saver and being able to add/delete pages at the MFP is great.


Create a Password Encrypted PDF File Type/ Send via Email

Pre-requisites:


Create an **Email Destination One-Touch** button prior to beginning the job shop. Confirm that print from **PageScope Web Connection** is set to **Yes** in the **Printer Settings** under **Administrator Settings**.

CREATE A PASSWORD ENCRYPTED PDF FILE TYPE


1. Load **Original**.
2. Press **Scan/Fax** icon.

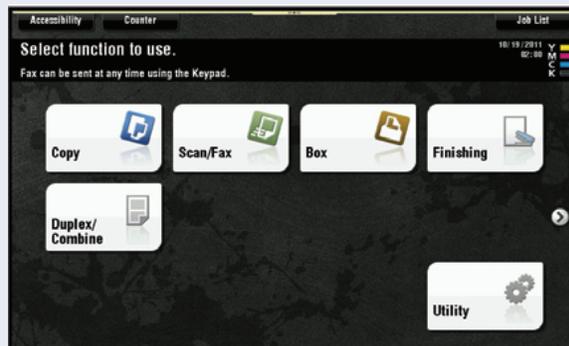

3. Touch **File Type**.
4. Select **PDF** as file type if not already set as default.
5. Touch **PDF Detail Setting**.

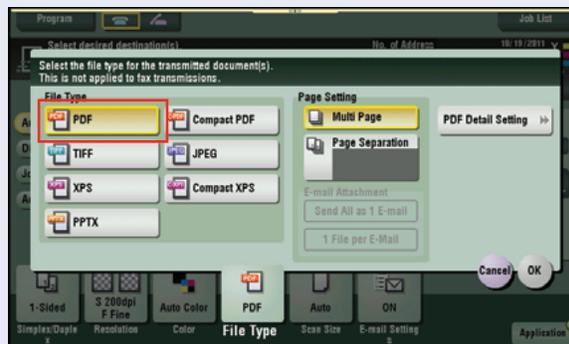


6. Touch **Encryption Off**.

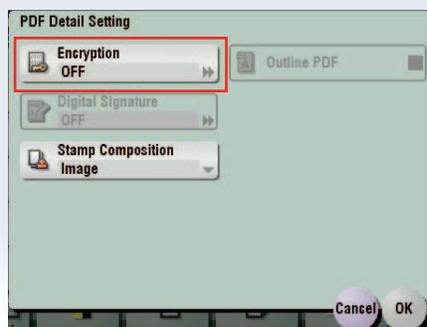


bizhub C754/C654 scan job shops

- 7. Turn **ON**.
- 8. Touch **Encryption Low Level**.
- 9. Select **High Level**.

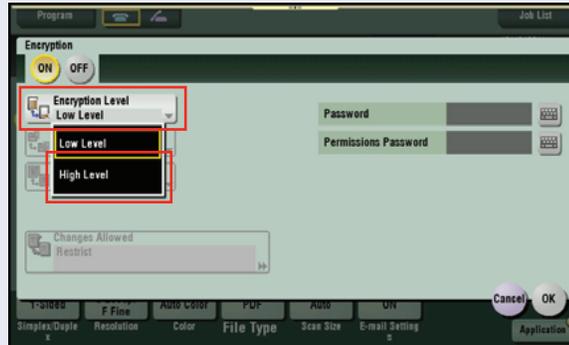

- 10. Touch **Password Keyboard** icon. Enter document changing permissions password. Enter **X**.

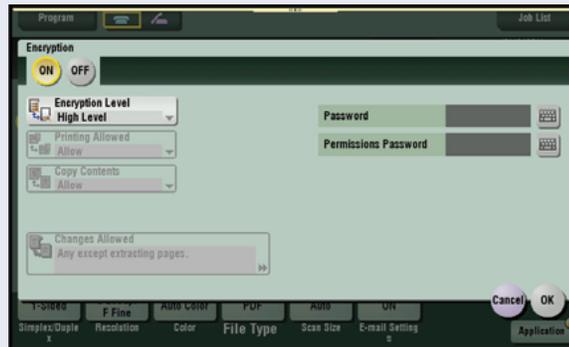

- 11. Touch **Password Confirmation**. Enter **X**.

- 12. Touch **OK**.

- 13. Touch **Permissions Password Keyboard** icon. Enter **Password** for recipient to open document. Enter **Y**.



- 14. Touch **Password Confirmation**. Enter **Y**.

NOTE: Document Permission Password cannot be the same as Encryption Password.


15. Touch **Printing Allowed Restrict.**

16. Select **Low Resolution.**



17. Touch **Copy Contents Restrict.**

18. Select **Allow.**

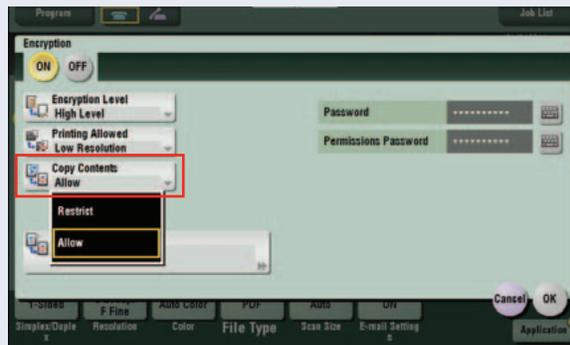

19. Touch **Changes Allowed Restrict.**

20. Select **Commenting, Filling in Form Fields and Signing.**

21. Touch **OK** 3x until you're back at the **Scan/Fax** address screen.



bizhub C754/C654 scan job shops

SEND FILE VIA EMAIL

- 22. Select **Email Destination**.
- 23. Press **Start**.
- 24. Document is scanned and sent.



LEGAL VERTICAL MARKETS



Useful Tips:

- Security is of great concern for the legal industry and having a Password Encrypted PDF File Type would ensure the document is secure and give peace of mind for the legal professional.


Registering an Email One Touch Button through PageScope Web Connection

Pre-requisites:

For Scan-to-Email to work the device must be configured to allow Scan-to-Email. Please verify this has been setup with the installing technician or appropriate office personnel.

PROCEDURE:

1. Open an **Internet Browser** i.e.... **Internet Explorer**  or **Mozilla Firefox** .
2. Enter the **IP Address** of the **MFP** in the address bar you desire to add the Email one touch button to. IP Address example **192.168.1.230**.

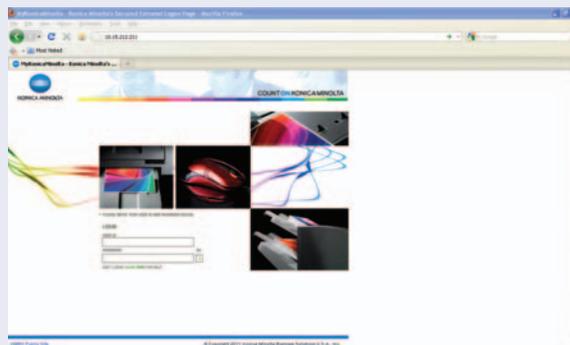

3. Press the **Enter** key on keyboard. This will take you to the **general** PSWC page of that device.
4. Select the **Store Address** tab.

Device Information

Device Name: KMST_C754
 Device Location: CEC-LAB
 Engine Serial Number: A4FK011901002
 Device Type: Print/Copy/Scan/Fax


Toner	Status
Yellow	97%
Magenta	98%
Cyan	96%
Black	97%

Paper Tray

Select	Tray	Paper Size	Paper Type	Paper Status
<input checked="" type="radio"/>	Bypass	Unknown	Thick 1+	Empty
<input type="radio"/>	Tray 1	8 1/2" x 11" LEF	Plain Paper	Ready
<input type="radio"/>	Tray 2	11" x 17" SEF	Plain Paper	Ready
<input type="radio"/>	Tray 3	8 1/2" x 14" SEF	Plain Paper	Ready
<input type="radio"/>	Tray 4	8 1/2" x 11" LEF	Plain Paper	Ready


bizhub C754/C654 scan job shops

5. Select **New Registration**.

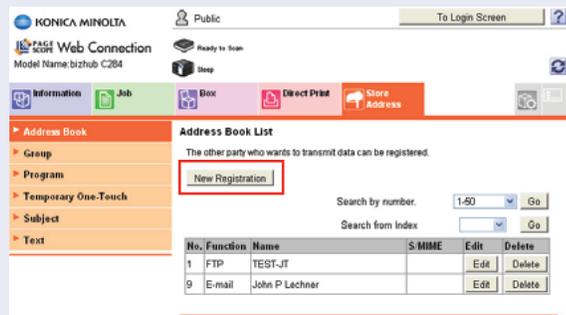

6. Click **Email** button.


7. Select **OK**.

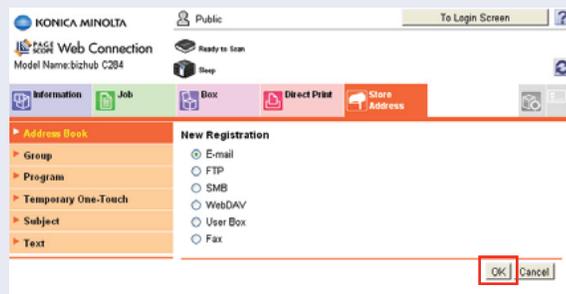

8. Select **Use Open Number**.

9. Enter the name of the person to be added to the Address Book.

10. In specify a keyword for address search... select the dropdown portion of the address book you would like the address to appear.

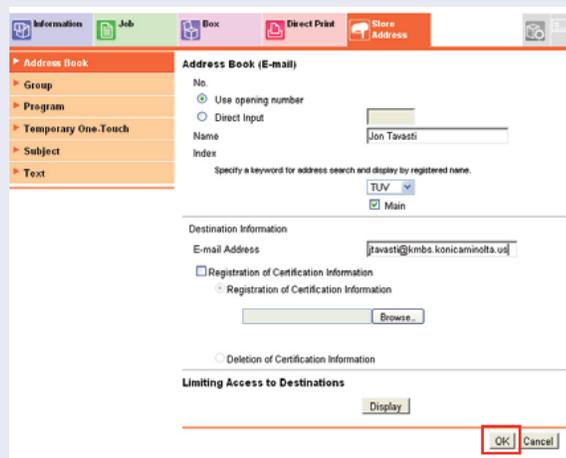

11. Check **Main** box for the new address to appear on the **Home** screen for **Scan/Fax**.

12. Enter the **Email** address to the person being added to the address book.

13. Select **OK** at the bottom of the page.

bizhub C754/C654 scan job shops

14. You will receive a message *“Address Book registration is complete.”*



15. Select **Return**.

16. Walk to the MFP where you registered the Email address into the Address Book. Touch **Scan/Fax** icon and locate your Email address.




Registering Scan Subject Lines


A Real Estate office employs many agents, each of which must communicate with their clients on a daily basis in an efficient and productive manner. The ability to pre-register default subject lines allows the realtor to store commonly used subject lines and retrieves them in an instant.

Up to 10-Email subjects can be registered. Once registered, it is easily accessible when sending and Email.


1. If not on the **Home** screen press the **Menu** key .
2. Select the **Utility** icon.

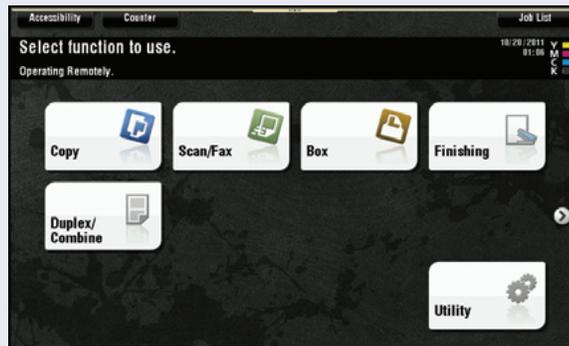


3. Touch **#1 One-Touch/ User Box Registration.**

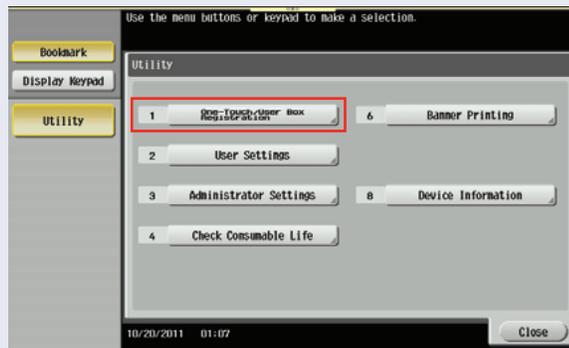


4. Touch **#1 Create One-Touch Destination.**

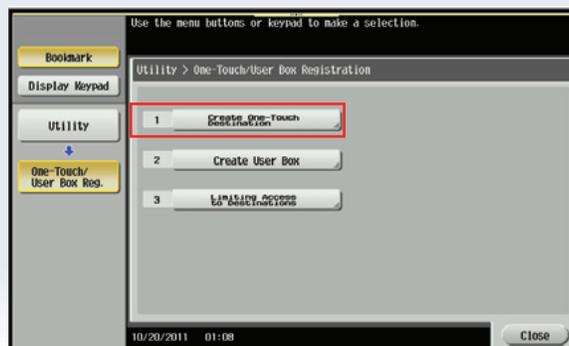


5. Touch **#4 Email Settings**.

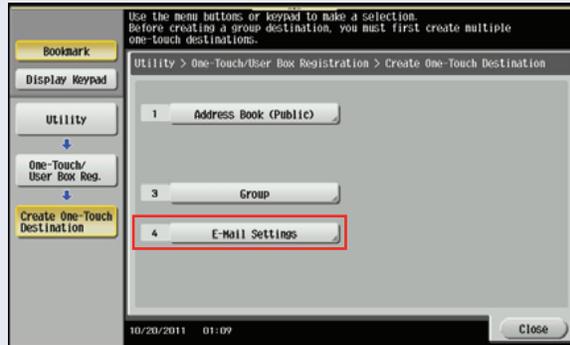


6. Touch **#1 Email Subject**.

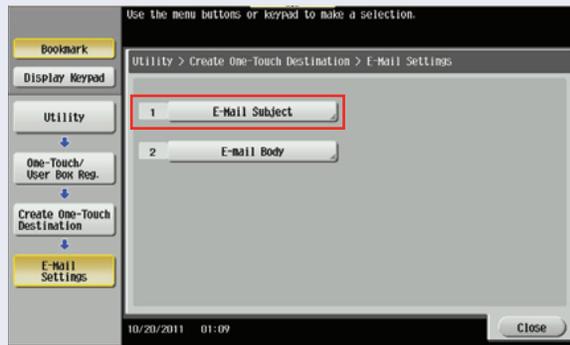

7. Touch **New**.

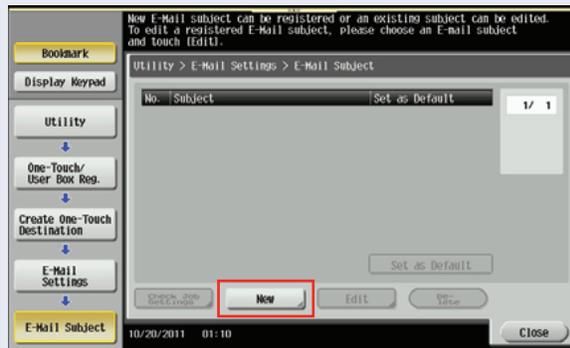

8. Touch **Subject**.

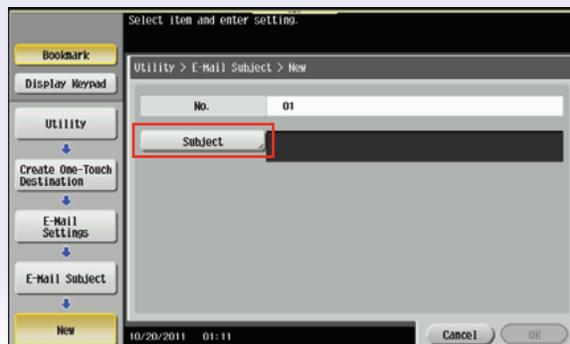

bizhub C754/C654 scan job shops


9. Enter **Subject**,
up to 64 characters
can be entered (type
"Title Documents").
10. Press **OK** twice.
11. The Email subject
has been registered.
12. Press **Close** until you
return to the main screen.



Selecting a Pre-registered Subject Line when sending an Email

1. If not on the **Home** screen press the **Menu** key .

2. Select the **Scan/Fax** icon on the **Home** screen.

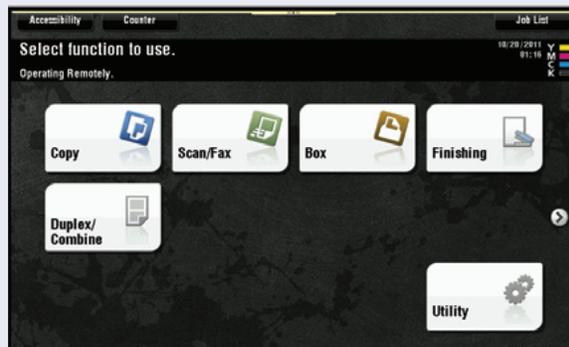

3. Load **Original** in **Document Feeder**.

4. Touch **Address Book** and select an **Email destination(s)**.



5. Touch **Email Settings** tab.


NOTE: The Document Name, Subject, From and Body fields appear. The default document name and default subject line appear in their respective fields.



6. Touch the **Subject Line** icon (next to the keyboard icon).

bizhub C754/C654 scan job shops

7. Highlight the desired subject (“**Title Documents**”).

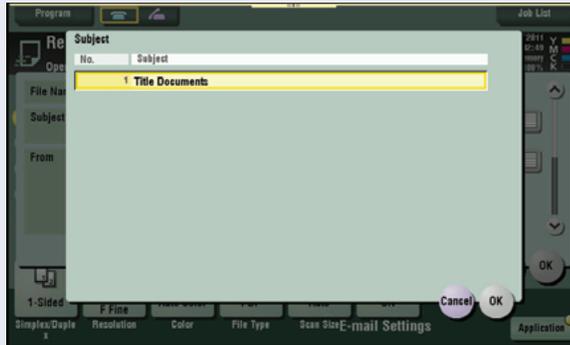

8. Touch **OK**.

NOTE: The registered subject selected in the previous step will appear in the subject line (and the selected subject will appear in the subject line of the received Email message).




9. Touch **OK**.
10. Press **Start** to send the Email.


Adding Menu Keys to the Home Screen

Application Icons can be placed on the bizhub's main screen to allow quick access to frequently used functions. These are the steps to add a scan function key to the home screen.


1. If not on the **Home** screen
Touch the **Menu** hard key on the **Control Panel** .
2. Touch the **Utility** icon.

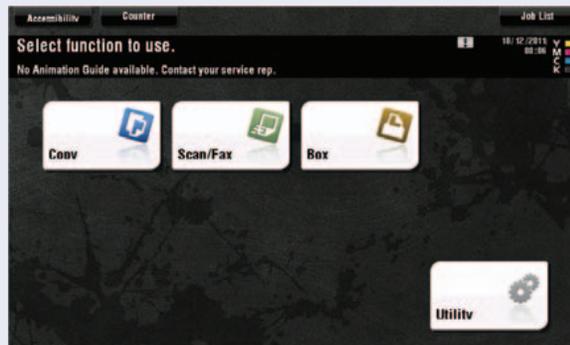

3. Touch the **#3 Administrator Settings** key, enter **1234567812345678** and touch **OK**.

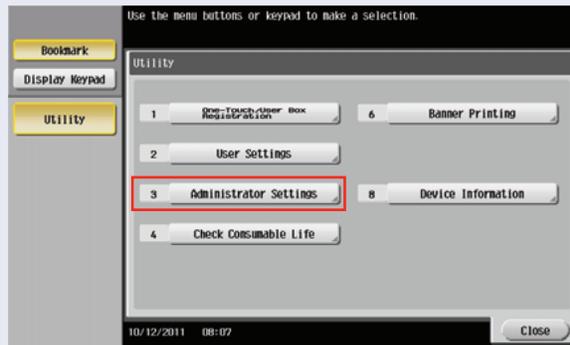


Touch the **#1 System Settings** key and press the **Forward (▶▶) Arrow** twice to get to the **3/3** screen.

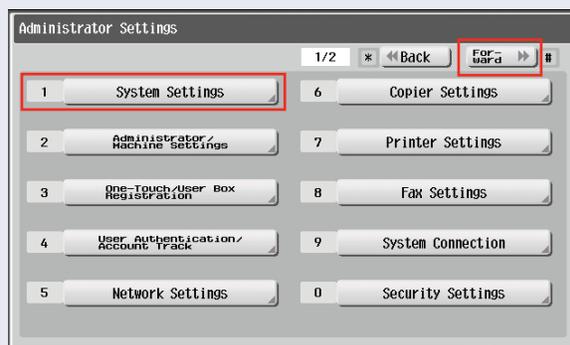


bizhub C754/C654 scan job shops

4. Select the **#4 Custom Display Settings** key.

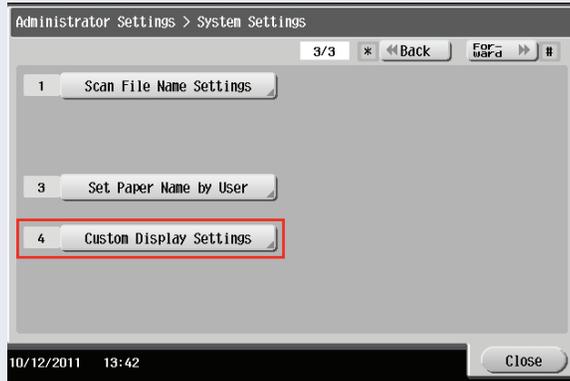


5. Select the **#1 Main Menu Default Settings** key.

NOTE: There are 20 possible keys that can be added to the HOME screen. The first 3 keys by default are set to COPY, SCAN/FAX and USER BOX. DO NOT CHANGE THESE KEYS.

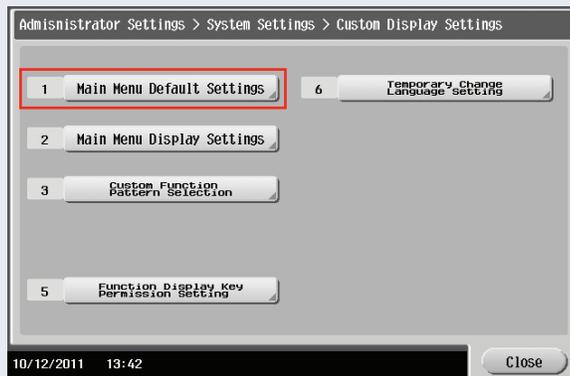

6. Touch any unassigned **Main Menu** Key.

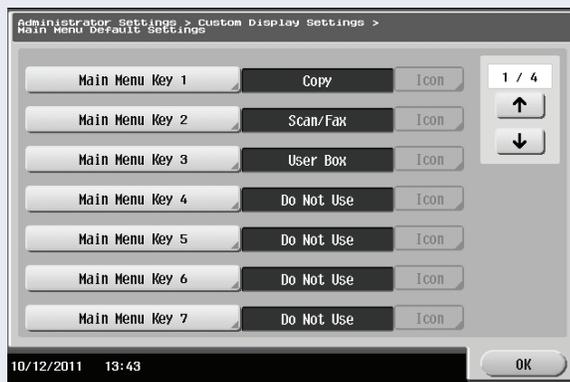


7. On the next screen touch the **ON** key.

8. Select the **Scan/Fax Function Settings** key.

NOTE: There are additional choices available on the screen.

The intention of this exercise is only to familiarize the user with


the procedure to add a key to the home screen. In practical use the same steps can be taken to add ANY of the available functions as Menu Keys on the home screen.

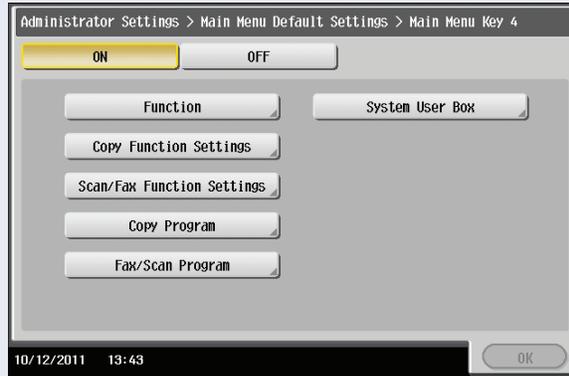


9. Select one of the scan functions displayed.

Example: **Simplex/Duplex**.

10. Press **OK** twice and press **Close** 4 times to exit.

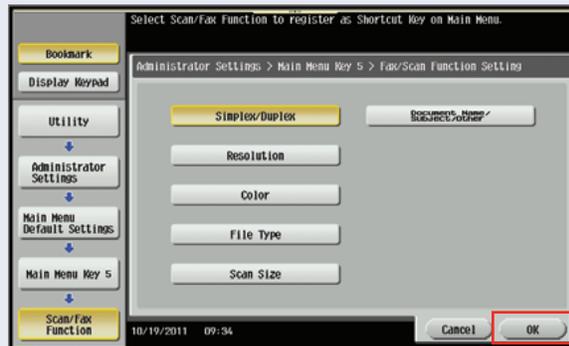

11. Press the **Menu**  key on the **Control Panel**. The new icon is displayed.

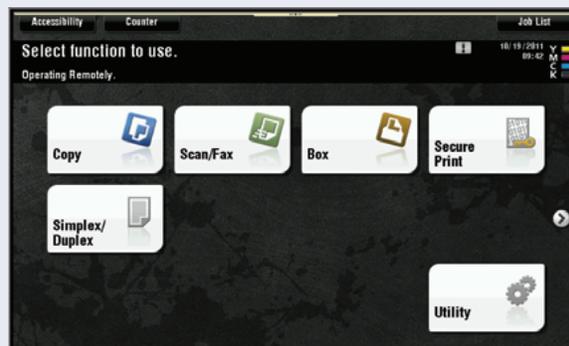

bizhub C754/C654 scan job shops

Blank Page Removal — Scan

Pre-requisite:

The file can be sent as an SMB scan, FTP scan or EMAIL attachment.

A one-touch Email or SMB button should be registered on the device in your office or showroom for demonstration purposes. If none are registered on the device, please refer to the Job shop titled

Registering an Email One Touch Button through Pagescope Web Connection

Have a multi-page original document with a few blank pages inserted in the document

If not on the **Home** screen touch the **Menu** key on the **Control Panel** .

Touch the **Scan/Fax** icon

APPLICATION

Your prospect regularly scans large documents and does not want any blank pages to be sent in the final document. Right now they scan it to their desktop and manually delete each blank page before sending or saving the document. This is time consuming and irritating. The bizhub has the ability to detect and remove blank pages from a scanned document.

PROCEDURE

1. Place the originals in the **Document Feeder**.
2. Select a **Registered One-Touch Destination**.
3. From the **Scan/Fax** main screen touch **Application**.
4. Touch **Original Settings**.
5. Touch **Blank Page Removal**.
6. Touch **OK**.
7. Touch **Close**.
8. Touch **Start**.




bizhub C754/C654 scan job shops

9. Open the file or Email attachment.



10. Notice that the blank pages have been removed.

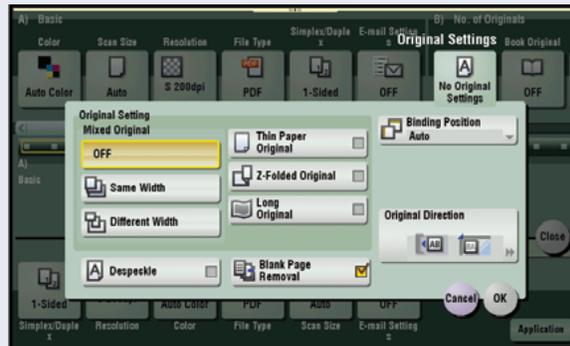

BENEFITS TO THE CUSTOMER

- Saves paper by eliminating blank pages when the document is printed.
- May assist a company with its “green” initiatives.
- Saves time associated with editing scanned documents.

LEGAL VERTICAL MARKETS



Qualifying Questions:

- Do you have legal documents that have blank pages inserted as section separators instead of tabs and you would like to make 2-sided copies without the blank pages?
- Do you receive documents from other law firms with many blank pages at the end of a section and you prefer to have them eliminated when you make copies to save on paper?
- Do you have or receive copies/originals that have a mixed sequence of single and double-sided sheets and you do not want any blank pages?

Useful Tips:

- Law firms often produce and receive large amount of documents that are 1-sided or 2-sided with blank pages or a mixed of both 1-sided or 2-sided pages and to save on page, the Blank Page Removal feature would be very useful.


Save and Print

This function allows the user to make copies of the document being scanned in one operation.

Parameter	Description
Copies	Use the keypad to type in the number of copies to be printed. A number between 1 and 9999 can be specified.
Simplex/Duplex	Select whether a single-sided or double-sided copy is to be printed.
Staple	Select whether or not the prints will be stapled. If they will be stapled, select the number of staples and the position.

If not on the **Home** screen touch the **Menu** key on the **Control Panel** .

1. Touch **Scan/Fax** icon on the **Home** screen.

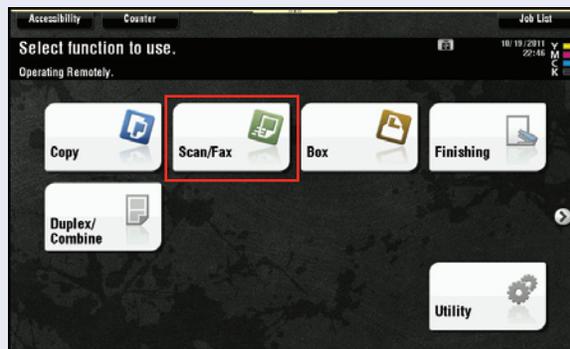

2. Touch **Application**.




3. Move the **Slider** touch **E** on the panel.



bizhub C754/C654 scan job shops

4. Touch **Save & Print**.

5. Touch **ON**.

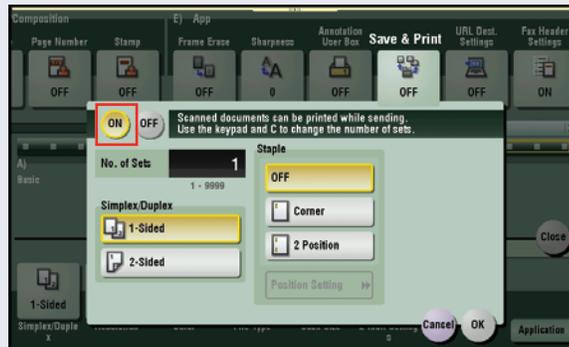

6. Enter **# of Sets** (1-9999) using numeric keypad.

7. Select **1-Sided** or **2-Sided** output.



8. Select **Staple Options** if needed (Staple: “Off,” “Corner,” “2-Position,” “Position Setting”).

If “2-Position” is selected, then select Position Setting and choose the position of the staple.



9. Touch **OK**.

10. Touch **Close**.

11. Select **Destination**.

12. Press **Start**.

Multiple File Attachment to Email using the Attachment Method Function

WHAT & WHY

Send separate, multiple documents to an Email destination with the bizhub.

The Multiple File Attachment feature using the Attachment Method function enables users to scan several documents, attach the documents as separate files, and send them all via one Email. Multiple data arrangements circumvent the need to combine very different documents into one file or send multiple Emails to keep the documents separate.

FUNCTION DESCRIPTION

Multi Page – Select to combine all scanned original data and save as a single file. This setting cannot be selected if “JPEG” or “PPTX” is selected for the file type.

Page Separation – Select to divide the scanned data at a specified page. Using the keypad, enter the number of pages to be saved in a file. (Notice that this number appears on the Scan Setting screen in the File Type box.)

Email Attachment Method – Specify the method for attaching a file to an Email when Page Separation is selected.

All Files Sent as (1) Email – Attaches all files to one Email.

- ▶ File attachment maximum to one Email is 300. If the file count exceeds 300, files are split and sent as multiple Email messages.

One (1) File per Email – Attaches one file to one Email.

NOTE: When saving a document in a User Box, it is saved with [Multi Page] while Page Separation is specified. Page Separation is enabled when sending by Email, SMB, or FTP.

bizhub C754/C654 scan job shops

APPLICATION

An office coordinator needs to send a copy of an expense report, time sheet, and travel directions to a colleague at a remote location. The coordinator wishes to scan the hard copy documents and send them via Email. However, sending these separate files via one Email with a single attachment really isn't an option; how will her colleague retrieve and file all the separate documents without manipulating the attached file? Sending each document as a separate Email would just be wasting time. You've indicated that using the Attachment Method function on the bizhub provides multiple options for sending separate, multiple files via one Email. The office coordinator has asked you to show them how to enable this function.

PROCEDURE

If not on the **Home** screen touch the **Menu** key on the **Control Panel** .

1. Press **Scan/Fax** icon on the **Home** screen.

2. Touch **File Type**.

3. Touch **Page Separation**.

NOTE: This will enable the Email Attachment Method area.



4. Select how your Email attachments should be configured:

- a. **All Files Sent as one (1) Email.**
- b. **One (1) File per Email.**

5. Press **OK** 2x.

6. Select **Destination(s)**.

7. Press **Start**.

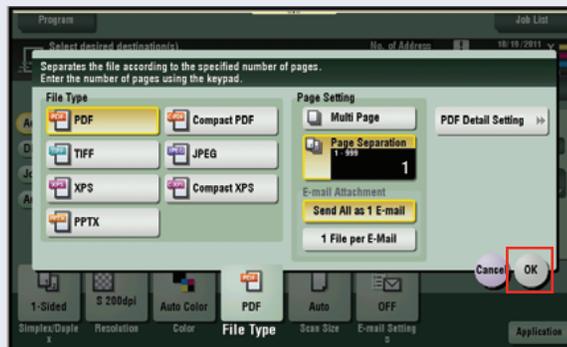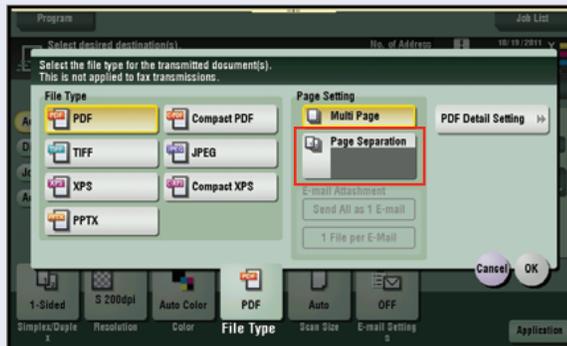

Programming Register Keys

Pre-requisites:

Requires Administrator rights.


BUSINESS APPLICATION

Customer wants to program the Register Key 1, Register Key 2 and Register Key 3 (hard keys) to access Scan/Fax functions, Copy Functions and 10 Keypad. Other options available to them should they want to change which functions are associated with each of the Register Keys include User Box and Utility. Other selections (such as APP) may also be available. The available selections are based upon how the machine is configured.

AT THE MFP

If not on the **Home** screen touch the **Menu** key on the Control Panel .


1. Touch the **Utility** icon.
2. Touch **Administrator Settings**.
3. Enter **Password** (default is **1234567812345678**) and touch **OK**.
4. Touch **System Settings**.
5. Touch the right arrow  to advance to screen 2/3.
6. Touch **Registered Key Settings**.
7. Touch **Register Key 1**.
8. Touch **Scan/Fax**.
9. Touch **OK**.
10. Touch **Register Key 2**.
11. Touch **Copy**.
12. Touch **OK**.
13. Touch **Register Key 3**.
14. Touch **10 Keypad**.
15. Touch **OK**.
16. Touch **Close 4x**.

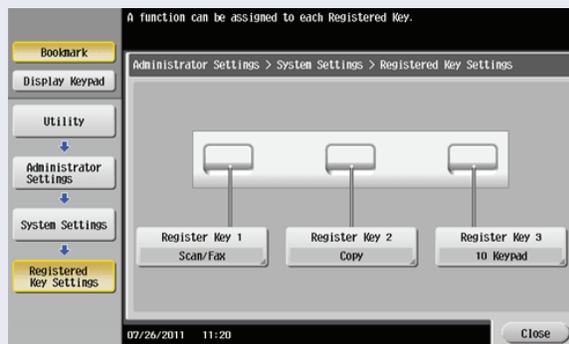


Adding User Box Shortcut Keys

Two keys can be placed on the opening screen of the User Box mode as a shortcut to over 10 additional User Box functions not available on the opening screen.

1. If not on the **Home** screen press the **Menu** key .
2. Touch **Utility** icon on the **Control Panel**.

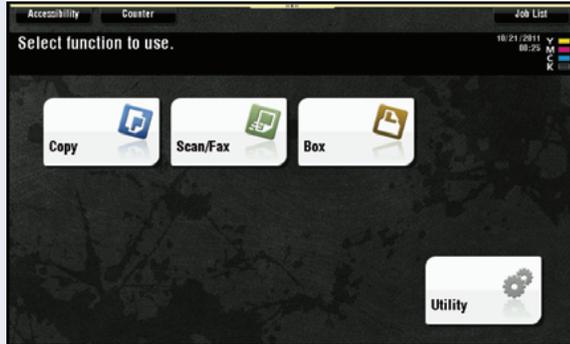

3. Touch **#2 User Settings**.

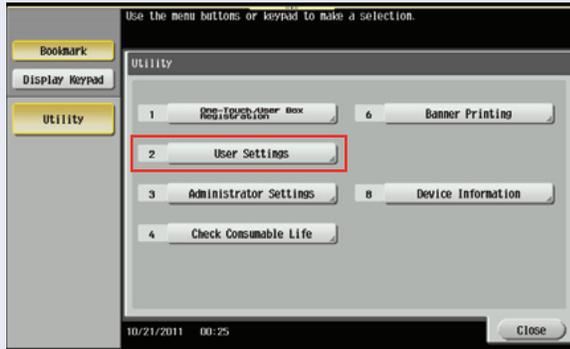


4. Touch **#2 Custom Display Settings**.

NOTE: Two "Shortcut Keys" can also be programmed for "Copy Mode"




5. Touch **#3 User Box Settings**.

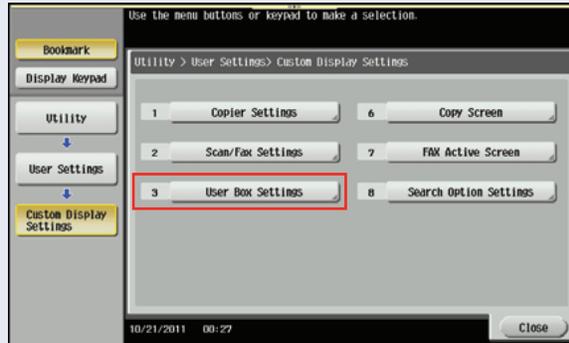

6. Touch **Shortcut Key 1**.

NOTE: To cancel the Shortcut Key, touch "Off"

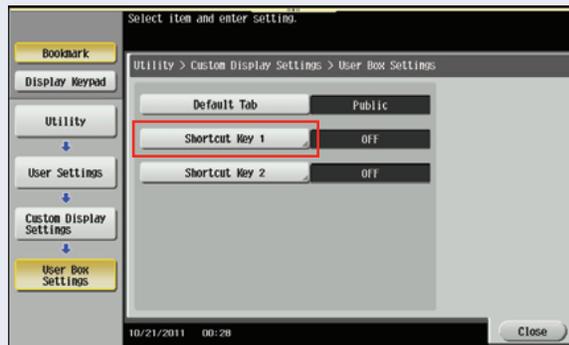


7. Touch **ON**.

8. Select **Secure Print User Box**.

9. Touch **OK**.




10. Touch **Shortcut Key 2**.

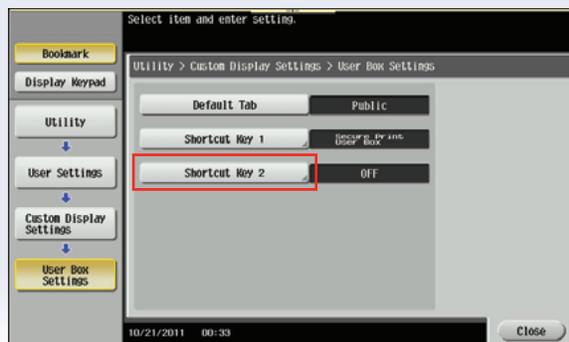

bizhub C754/C654 scan job shops

11. Touch **ON**.
12. Select **Encrypted PDF User Box**.
13. Touch **OK**.
14. Press **Close** 4 times until you return to the **Home** screen.
15. Touch **Box** and verify that the 2 shortcut keys are visible on the left side of the screen.

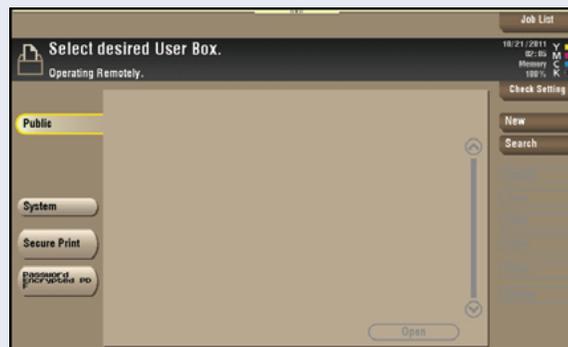



KONICA MINOLTA

Konica Minolta
Business Solutions Australia Pty Ltd

Free Call 1800 789 389
konicaminolta.com.au

New South Wales

4 Drake Avenue
Macquarie Park NSW 2113
(02) 8026 2222

Victoria

21-29 Moray Street
Southbank VIC 3006
(03) 8699 0777

Queensland

64 Brookes Street
Bowen Hills QLD 4006
(07) 3872 9100

ACT

Unit 1, Ground Floor
55 Wentworht Avenue
Kingston, ACT 2604
(02) 6206 6500

South Australia

255 Gilbert Street
Adelaide SA 5000
(08) 8231 2911

Western Australia

GF/ 140 Hay St.,
Subiaco, WA, 6008
(08) 9479 6600



Product appearance, configuration and/or specifications are subject to change without notice.

The Konica Minolta logo and the symbol mark, are registered trademarks or trademarks of Konica Minolta Holdings, Inc. bizhub, PageScope, Simitri and the Emperon logo are registered trademarks or trademarks of KONICA MINOLTA BUSINESS TECHNOLOGIES, INC. Windows is registered trademark of Microsoft Corporation in the United States and other countries. Adobe and PostScript are registered trademarks or trademarks of Adobe Systems Incorporated. All other brand and product names are registered trademarks or trademarks of their respective owners.



Ecology & Environment

KONICA MINOLTA copiers and multi-functional products are designed with the environment in mind.

- Energy Star
- RoHS Compliance
- WEEE Compliance
- Eco-conscious Toners
- Production at ISO Certified Factories

⚠ Requirements for safe use.

- Please read and follow the instruction manual to ensure safe operation.
- Only operate using appropriate power supply and voltage.
- Connecting the earth wire to an inappropriate place may cause explosion or electric shock. Please connect accordingly (Taiwan and the Philippines only).